

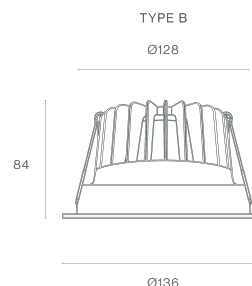
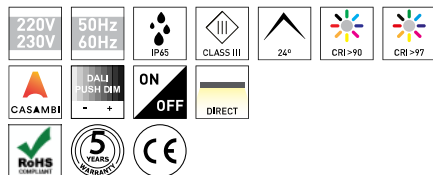
DESCRIPTION

TYR - IP65 downlight for technical and demanding environments. The TYR is a downlight designed for environments where IP65 protection is essential, ensuring total protection against dust and water resistance. It is the ideal choice for areas such as sanitary facilities, changing rooms, technical areas, industrial kitchens or covered outdoor access points.

| | |
|---------------------------|----------------------------------|
| MOUNTING | Encastrar |
| LIGHT DISTRIBUTION | Direct |
| POWER SUPPLY | 220-230V / 50-60 Hz |
| WARRANTY | 5 Years |
| FINISHING | Textured White |
| CONTROL | CASAMBI, DALI / PUSH Dim, ON/OFF |


LED FEATURES

| | |
|-----------------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 154 lm/W |
| CRI | CRI→90, CRI→97 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |

TECHNICAL DRAWING

ICONOGRAPHY

TYR 13W - IP65
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| LENGTH | POWER | FINISHING | CONTROLTYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|-------------|------------|------------|--------------|-------------|-----------------|
| 136 | 13,4 | TW | CS, DA, NF | 24, 55 | 1863 | 1583 | 2700K | 124XX.24.927.FI |
| 136 | 13,4 | TW | CS, DA, NF | 24, 55 | 1863 | 1583 | 2700K | 124XX.55.927.FI |
| 136 | 13,4 | TW | CS, DA, NF | 24, 55 | 1916 | 1629 | 3000K | 124XX.24.930.FI |
| 136 | 13,4 | TW | CS, DA, NF | 24, 55 | 1916 | 1629 | 3000K | 124XX.55.930.FI |
| 136 | 13,4 | TW | CS, DA, NF | 24, 55 | 2064 | 1754 | 4000K | 124XX.24.940.FI |
| 136 | 13,4 | TW | CS, DA, NF | 24, 55 | 2064 | 1754 | 4000K | 124XX.55.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROLTYPE | XX | FINISHING | FI | BEAM ANGLE | BA |
|-----------------|----|----------------|----|------------|----|
| CASAMBI | CS | Textured White | TW | 24° | 24 |
| DALI / PUSH Dim | DA | | | 55° | 55 |
| ON/OFF | NF | | | | |

TYR 13W - IP65
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

| LENGTH | POWER | FINISHING | CONTROLTYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|-------------|------------|------------|--------------|-------------|------------------|
| 136 | 13,7 | TW | CS, DA, NF | 24, 55 | 1505 | 1279 | 2700K | 124XX.24.9727.FI |
| 136 | 13,7 | TW | CS, DA, NF | 24, 55 | 1505 | 1279 | 2700K | 124XX.55.9727.FI |
| 136 | 13,7 | TW | CS, DA, NF | 24, 55 | 1601 | 1360 | 3000K | 124XX.24.9730.FI |
| 136 | 13,7 | TW | CS, DA, NF | 24, 55 | 1601 | 1360 | 3000K | 124XX.55.9730.FI |
| 136 | 13,7 | TW | CS, DA, NF | 24, 55 | 1696 | 1442 | 4000K | 124XX.24.9740.FI |
| 136 | 13,7 | TW | CS, DA, NF | 24, 55 | 1696 | 1442 | 4000K | 124XX.55.9740.FI |

SELECT YOUR PREFERRED OPTION

| CONTROLTYPE | XX | FINISHING | FI | BEAM ANGLE | BA |
|-----------------|----|----------------|----|------------|----|
| CASAMBI | CS | Textured White | TW | 24° | 24 |
| DALI / PUSH Dim | DA | | | 55° | 55 |
| ON/OFF | NF | | | | |