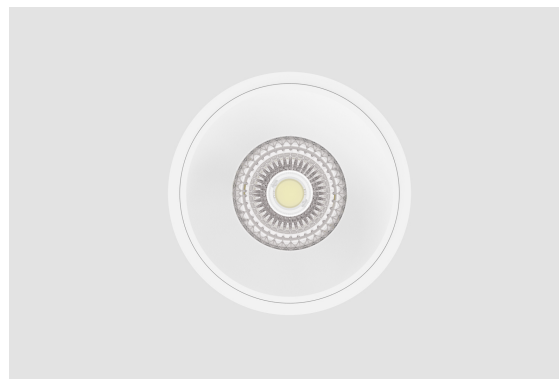



**DESCRIPTION**

TYR - IP65 downlight for technical and demanding environments.  
 The TYR is a downlight designed for environments where IP65 protection is essential, ensuring total protection against dust and water resistance.  
 It is the ideal choice for areas such as sanitary facilities, changing rooms, technical areas, industrial kitchens or covered outdoor access points.

<b>MOUNTING TYPE</b>	Encastrar
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 151 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

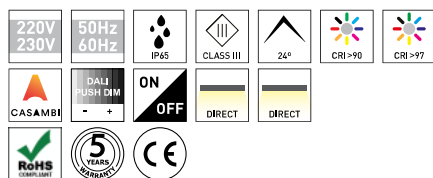**TECHNICAL DRAWING**
**ICONOGRAPHY**


**TYR 17W - IP65**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
136	17	TW	CS, DA, NF	24, 55	2261	1922	2700K	134XX.24.927.FI
136	17	TW	CS, DA, NF	24, 55	2261	1922	2700K	134XX.55.927.FI
136	17	TW	CS, DA, NF	24, 55	2363	2009	3000K	134XX.24.930.FI
136	17	TW	CS, DA, NF	24, 55	2363	2009	3000K	134XX.55.930.FI
136	17	TW	CS, DA, NF	24, 55	2567	2182	4000K	134XX.24.940.FI
136	17	TW	CS, DA, NF	24, 55	2567	2182	4000K	134XX.55.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			55°	55
ON/OFF	NF				


**TYR 17W - IP65**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
136	17.7	TW	CS, DA, NF	24, 55	1853	1575	2700K	134XX.24.9727.FI
136	17.7	TW	CS, DA, NF	24, 55	1853	1575	2700K	134XX.55.9727.FI
136	17.7	TW	CS, DA, NF	24, 55	1977	1680	3000K	134XX.24.9730.FI
136	17.7	TW	CS, DA, NF	24, 55	1977	1680	3000K	134XX.55.9730.FI
136	17.7	TW	CS, DA, NF	24, 55	2083	1770	4000K	134XX.24.9740.FI
136	17.7	TW	CS, DA, NF	24, 55	2083	1770	4000K	134XX.55.9740.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			55°	55
ON/OFF	NF				