

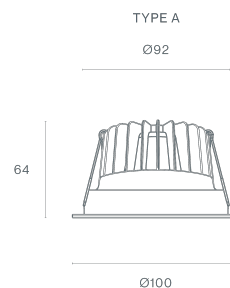
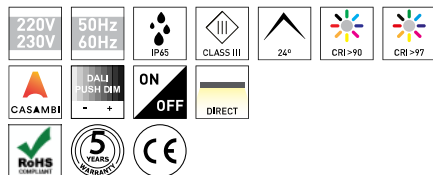
**DESCRIPTION**

TYR - IP65 downlight for technical and demanding environments. The TYR is a downlight designed for environments where IP65 protection is essential, ensuring total protection against dust and water resistance. It is the ideal choice for areas such as sanitary facilities, changing rooms, technical areas, industrial kitchens or covered outdoor access points.

<b>MOUNTING</b>	Encastrar
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured White
<b>CONTROL</b>	CASAMBI, DALI / PUSH Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 161 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**TYR 8W - IP65**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	8,1	TW	CS, DA, NF	24, 55	1203	1023	2700K	123XX.24.927.FI
100	8,1	TW	CS, DA, NF	24, 55	1203	1023	2700K	123XX.55.927.FI
100	8,1	TW	CS, DA, NF	24, 55	1244	1057	3000K	123XX.24.930.FI
100	8,1	TW	CS, DA, NF	24, 55	1244	1057	3000K	123XX.55.930.FI
100	8,1	TW	CS, DA, NF	24, 55	1300	1105	4000K	123XX.24.940.FI
100	8,1	TW	CS, DA, NF	24, 55	1300	1105	4000K	123XX.55.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			55°	55
ON/OFF	NF				

**TYR 8W - IP65**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	8,8	TW	CS, DA, NF	24, 55	918	780	2700K	123XX.24.9727.FI
100	8,8	TW	CS, DA, NF	24, 55	918	780	2700K	123XX.55.9727.FI
100	8,8	TW	CS, DA, NF	24, 55	980	833	3000K	123XX.24.9730.FI
100	8,8	TW	CS, DA, NF	24, 55	980	833	3000K	123XX.55.9730.FI
100	8,8	TW	CS, DA, NF	24, 55	1033	878	4000K	123XX.24.9740.FI
100	8,8	TW	CS, DA, NF	24, 55	1033	878	4000K	123XX.55.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			55°	55
ON/OFF	NF				