

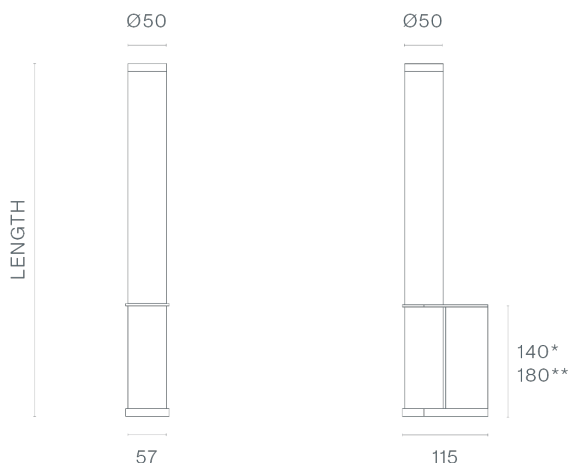
DESCRIPTION

A solution that combines elegance and functionality. Available in a wide range of lengths, IRIS casts a perfect linear light, ensuring uniform and harmonious lighting in any room. Its tubular construction features an opal polycarbonate tube paired with aluminum end caps.

MONTAGE	Saliente
DISTRIBUTION D'ÉCLAIRAGE	360°
SOURCE D'ALIMENTATION	220-230V / 50-60 Hz
GARANTIE	5 Années
FINITION	Blanc Texturé, Noir Texturé
CONTRÔLE	DALI / PUSH Dim, ON/OFF

CARACTÉRISTIQUES DU LED

EFFICACITÉ LUMINEUSE	UP TO 171 lm/W
CRI	CRI→90
DURÉE DE VIE	50.000 Heures
STEPS MACADAM	3 STEPS MACADAM
LUMEN MAINTENANCE	L90/B50
RISQUE PHOTOBIOLOGIQUE	RG1


DESSIN TECHNIQUE

ICONOGRAPHIE

**IRIS S 360
TABLEAU DES PRODUITS ET SPÉCIFICATIONS TECHNIQUES - CRI→90**

LONGUEUR	POWER	FINITION	TEMP. COULEUR	CONTROLTYPE	LED LUMENS	LM LUMINAIRE	CODE
175	3,4	TB, TW	3000K	DA, NF	547	452	5159XX.01.930.FI
175	3,4	TB, TW	4000K	DA, NF	581	480	5159XX.01.940.FI
320	8,5	TB, TW	3000K	DA, NF	1369	1129	5159XX.03.930.FI
320	8,5	TB, TW	4000K	DA, NF	1454	1199	5159XX.03.940.FI
620	17	TB, TW	3000K	DA, NF	2737	2258	5159XX.06.930.FI
620	17	TB, TW	4000K	DA, NF	2907	2398	5159XX.06.940.FI
920	23,8	TB, TW	3000K	DA, NF	3832	3161	5159XX.09.930.FI
920	23,8	TB, TW	4000K	DA, NF	4070	3358	5159XX.09.940.FI
1215	30,6	TB, TW	3000K	DA, NF	4927	4064	5159XX.12.930.FI
1215	30,6	TB, TW	4000K	DA, NF	5233	4317	5159XX.12.940.FI

SÉLECTIONNEZ VOTRE OPTION PRÉFÉRÉE

CONTROLTYPE	XX	TEMP. COULEUR	CT	FINITION	FI
DALI / PUSH Dim	DA	3000K	30	Noir Texturé	TB
ON/OFF	NF	4000K	40	Blanc Texturé	TW