

DESCRIPTION
GENERAL INFORMATION

LED TYPE: SMD5050

VOLTAGE: 24V

USE: 24H

IP: IP65

CLASS: III

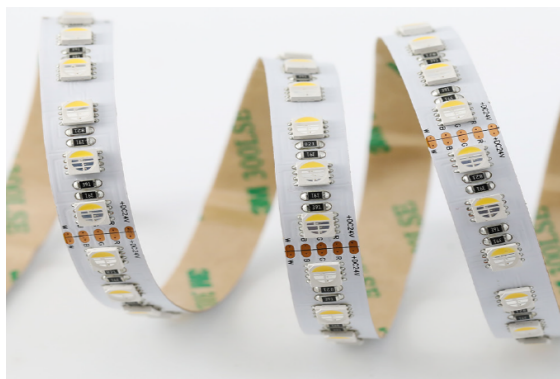
TEMPERATURE: -20°~40°

CUT: 10CM

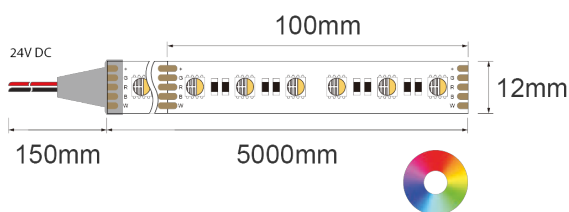

WARRANTY: 5 YEARS

LENGTH: 5M

SOURCE D'ALIMENTATION 24V / 50-60 Hz


DESSIN TECHNIQUE

2002-1116


ICONOGRAPHIE


2002-1116 RGBW 14,4W IP65

TABLEAU DES PRODUITS ET SPÉCIFICATIONS TECHNIQUES - 2002-1116 Bande Professionnelle 60 LED SMD5050 14,4W/m 24VDC IP65

CRI>80 5m/rouleau RGBW

POWER	TENSION	TEMP. COULEUR	FLUX LUMINEUX NOMINAL/M	EFFICACITÉ LED	UN.	CODE
14,4	24V		775	54	5MT	2002-1116

ACCESSOIRES

 TRIX profile d'aluminium
TRIX profile d'aluminium

 SEM TITULO -
8010-2002.AL

 OP23 Profilé Angle
OP23 Profilé Angle

 SEM TITULO -
G810-4052

 LP05 profile d'aluminium
LP05 profile d'aluminium

 SEM TITULO -
G810-5201

 LP03 Profilé Encastré
LP03 Profilé Encastré

 SEM TITULO -
G810-6032

 LP08 Profilé Encastré
LP08 Profilé Encastré

 SEM TITULO -
G810-6082

 LP10 profile d'aluminium
LP10 profile d'aluminium

 SEM TITULO -
G810-7012

	NP04 profile d'aluminium NP04 profile d'aluminium	SEM TITULO - G820-1012
	NP06 profile d'aluminium NP06 profile d'aluminium	SEM TITULO - G830-1017
	NP07 Profilé Encastré NP07 Profilé Encastré	SEM TITULO - G830-5015
	NP17 profile d'aluminium NP17 profile d'aluminium	SEM TITULO - G810-2026
	FP02 Monté en Bordure FP02 Monté en Bordure	SEM TITULO - G810-2034
	OP15 profile d'aluminium OP15 profile d'aluminium	SEM TITULO - G810-2062
	LP06 profile d'aluminium LP06 profile d'aluminium	SEM TITULO - G810-6062