

DESCRIPTION

GENERAL INFORMATION

LED TYPE: SMD5050

VOLTAGE: 24V

USE: 24H

IP: IP65

CLASS: III


TEMPERATURE: -20°~40°

CUT: 10CM

WARRANTY: 5 YEARS


LENGTH: 5M

SOURCE D'ALIMENTATION 24V / 50-60 Hz

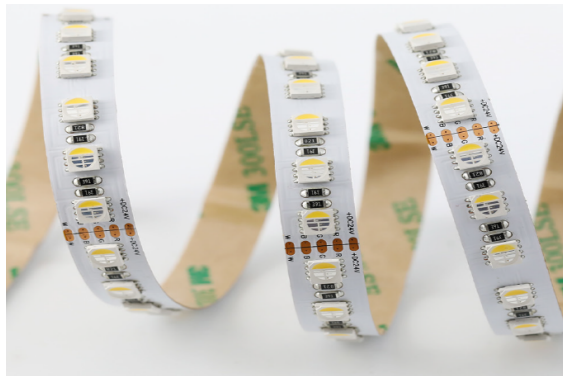


DESSIN TECHNIQUE

2002-1116

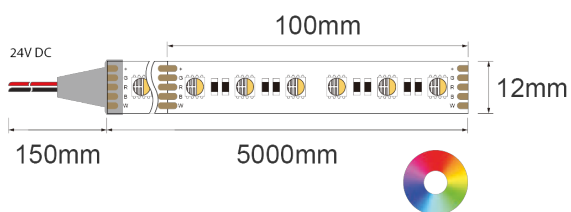

ICONOGRAPHIE




2002-1116 RGBW 14,4W IP65


TABLEAU DES PRODUITS ET SPÉCIFICATIONS TECHNIQUES - 2002-1116 Bande Professionnelle 60 LED SMD5050 14,4W/m 24VDC IP65


CRI>80 5m/rouleau RGBW


POWER	TENSION	TEMP. COULEUR	FLUX LUMINEUX NOMINAL/M	EFFICACITÉ LED	UN.	CODE
14,4	24V		775	54	5MT	2002-1116


ACCESSOIRES


 **TRIX profile d'aluminium**
TRIX profile d'aluminium
SEM TITULO - 8010-2002.AL


 **OP23 Profilé Angle**
OP23 Profilé Angle
SEM TITULO - G810-4052

 **LP05 profile d'aluminium**
LP05 profile d'aluminium
SEM TITULO - G810-5201

 **LP03 Profilé Encastré**
LP03 Profilé Encastré
SEM TITULO - G810-6032

 **LP08 Profilé Encastré**
LP08 Profilé Encastré
SEM TITULO - G810-6082

 **LP10 profile d'aluminium**
LP10 profile d'aluminium
SEM TITULO - G810-7012



NP04 profile d'aluminium
NP04 profile d'aluminium

SEM TITULO -
G820-1012



NP06 profile d'aluminium
NP06 profile d'aluminium

SEM TITULO -
G830-1017



NP07 Profilé Encastré
NP07 Profilé Encastré

SEM TITULO -
G830-5015



NP17 profile d'aluminium
NP17 profile d'aluminium

SEM TITULO -
G810-2026



FP02 Monté en Bordure
FP02 Monté en Bordure

SEM TITULO -
G810-2034



OP15 profile d'aluminium
OP15 profile d'aluminium

SEM TITULO -
G810-2062



LP06 profile d'aluminium
LP06 profile d'aluminium

SEM TITULO -
G810-6062