

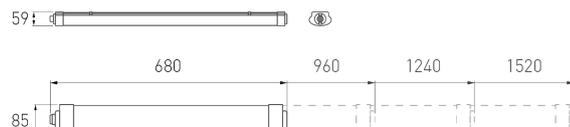
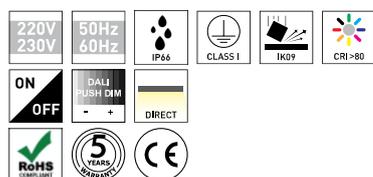
DESCRIÇÃO

The SOFTIS is a highly efficient luminaire with up to 211lm/W. This luminaire is the ideal solution for lighting large areas with very different purposes, such as parking lots, technical areas, industrial areas, hypermarkets, assembly lines and sports halls.

DISTRIBUTION DE LA LUMIÈRE	Direct
SOURCE D'ALIMENTATION	220-230V / 50-60 Hz
GARANTIE	5 Années
CONTRÔLE	DALI / Switch Dim, ON/OFF


CARACTÉRISTIQUES DU LED

IK	IK09
CRI	CRI→80
DURÉE DE VIE	50.000 Heures
STEPS MACADAM	3 STEPS MACADAM
LUMEN MAINTENANCE	L90/B50
RISQUE PHOTOBIOLOGIQUE	RG1

DESSIN TECHNIQUE

ICONOGRAPHIE

**SOFTIS CÂBLAGE TRAVERSANT
TABLEAU DES PRODUITS ET SPÉCIFICATIONS TECHNIQUES - CRI→80**

LONGUEUR	POWER	CONTRÔLE TYPE	ANGLE	LED LUMENS	LM LUMINAIRE	TEMP. COULEUR	CODE
680	13.3	DA, NF	120	2698	2293	3000K	761XX.06.830
680	13.3	DA, NF	120	2818	2395	4000K	761XX.06.840
960	20	DA, NF	120	4047	3440	3000K	761XX.09.830
960	20	DA, NF	120	4227	3593	4000K	761XX.09.840
1240	26.7	DA, NF	120	5396	4587	3000K	761XX.12.830
1240	26.7	DA, NF	120	5636	4791	4000K	761XX.12.840
1520	33.4	DA, NF	120	6745	5733	3000K	761XX.15.830
1520	33.4	DA, NF	120	7045	5988	4000K	761XX.15.840

**SÉLECTIONNEZ VOTRE OPTION
PRÉFÉRÉE**

CONTRÔLE TYPE	XX
DALI / Switch Dim	DA
ON/OFF	NF

ACCESSOIRES

	Kit de Suspension Kit Suspension 1,5m (1un) Kit Suspension 3 m (1un) Kit Suspension 5 m (1un)	Argent 80303017.SL 80303018.SL 80303019.SL
	Kit d'urgence 150W 1H Kit d'urgence 150W 1H	. 6080-006
	Kit d'urgence 150W 3H Kit d'urgence 150W 3H	. 6080-007