

DESCRIPCIÓN

One of the lighting trends is the trimless downlights, aluminium light fittings without trims, easy to install and perfect to recess in false ceilings. Brilumen introduces you this range of products, indented or with tube, suitable for ambient lighting of any room that requires discrete luminaires which do not change the ceiling aesthetics, but at the same time are modern with advanced technology, and effectively illuminate the entire environment. Eridane, Spitzer, Monet & Hubble are available on ON-OFF and dimmable 0-10V mode, are compatible with the DALI system and have a high colour rendering index as well as an excellent textured white finish.


MONTAJE	Empotrada
DISTRIBUCIÓN DE LUZ	Directa
GARANTÍA	5 Años
ACABADO	Blanco texturizado
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF




CARACTERÍSTICAS DEL LED

EFICIENCIA LUMINOSA	UP TO 161 lm/W
CRI	CRI->90, CRI->97
VIDA ÚTIL	50.000 Horas
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
RIESGO FOTBIOLÓGICO	RG1

DISEÑO TÉCNICO

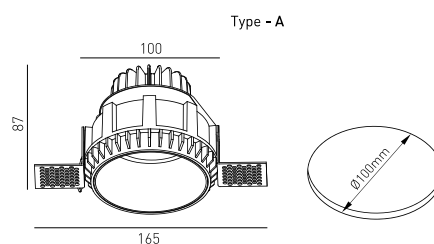

ICONOGRAFÍA

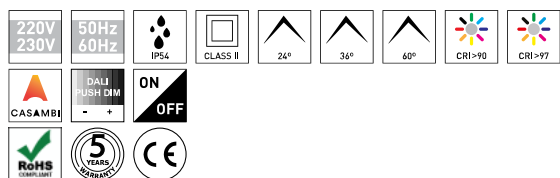

MONET TRIMLESS 8,6W
 TABLA DE PRODUCTOS Y ESPECIFICACIONES TÉCNICAS - CRI->90

LONGITUD	POTENCIA	ACABADO	CONTROLTYPE	ÁNGULO	LED LUMENS	LUMENS LUM.	TEMP. COLOR	CÓDIGO
100	8,1	TW	CS, DA, NF	24, 36, 60	1203	1023	2700K	5327XX.BA.927.FI
100	8,1	TW	CS, DA, NF	24, 36, 60	1244	1057	3000K	5327XX.BA.930.FI
100	8,1	TW	CS, DA, NF	24, 36, 60	1300	1105	4000K	5327XX.BA.940.FI

SELECCIONA TU OPCIÓN PREFERIDA	CONTROLTYPE	XX	ACABADO	FI	ÁNGULO	BA
	CASAMBI	CS	Blanco texturizado	TW	24°	24
	DALI / Switch Dim	DA			36°	36
	ON/OFF	NF			60°	60

MONET TRIMLESS 8,6W
 TABLA DE PRODUCTOS Y ESPECIFICACIONES TÉCNICAS - CRI->97

LONGITUD	POTENCIA	ACABADO	CONTROLTYPE	ÁNGULO	LED LUMENS	LUMENS LUM.	TEMP. COLOR	CÓDIGO
100	8,8	TW	CS, DA, NF	24, 36, 60	918	780	2700K	5327XX.BA.9727.FI
100	8,8	TW	CS, DA, NF	24, 36, 60	980	833	3000K	5327XX.BA.9730.FI
100	8,8	TW	CS, DA, NF	24, 36, 60	1033	878	4000K	5327XX.BA.9740.FI

SELECCIONA TU OPCIÓN PREFERIDA	CONTROLTYPE	XX	ACABADO	FI	ÁNGULO	BA
	CASAMBI	CS	Blanco texturizado	TW	24°	24
	DALI / Switch Dim	DA			36°	36
	ON/OFF	NF			60°	60