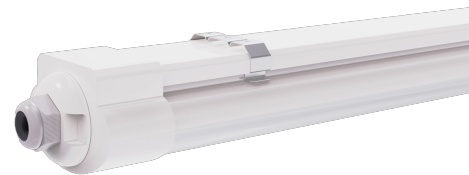


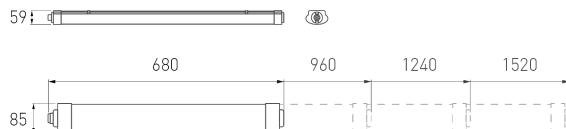
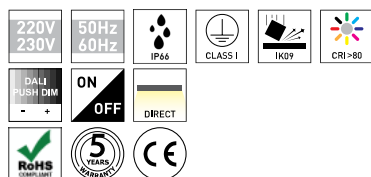
DESCRIPCIÓN

The SOFTIS is a highly efficient luminaire with up to 211lm/W. This luminaire is the ideal solution for lighting large areas with very different purposes, such as parking lots, technical areas, industrial areas, hypermarkets, assembly lines and sports halls.

MONTAJE	Suspendida/Superficie
DISTRIBUCIÓN DE LA LUZ	Directa
FUENTE DE ALIMENTACIÓN	220-230V / 50-60 Hz
GARANTÍA	5 Años
CONTROL	DALI / Switch Dim, ON/OFF


CARACTERÍSTICAS DEL LED

IK	IK09
CRI	CRI>80
VIDA ÚTIL	50.000 Horas
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
RIESGO FOTOBiolÓGICO	RG1

DISEÑO TÉCNICO

ICONOGRAFÍA

**SOFTIS W/ THROUGH WIRING
TABLA DE PRODUCTOS Y ESPECIFICACIONES TÉCNICAS - CRI>80**

LONGITUD	POTENCIA	CONTROLTYPE	ÁNGULO	LED LUMENS	LUMENS LUM.	TEMP. COLOR	CÓDIGO
680	13.3	DA, NF	120	2698	2293	3000K	761XX.06.830
680	13.3	DA, NF	120	2818	2395	4000K	761XX.06.840
960	20	DA, NF	120	4047	3440	3000K	761XX.09.830
960	20	DA, NF	120	4227	3593	4000K	761XX.09.840
1240	26.7	DA, NF	120	5396	4587	3000K	761XX.12.830
1240	26.7	DA, NF	120	5636	4791	4000K	761XX.12.840
1520	33.4	DA, NF	120	6745	5733	3000K	761XX.15.830
1520	33.4	DA, NF	120	7045	5988	4000K	761XX.15.840

**SELECCIONA TU OPCIÓN
PREFERIDA**

CONTROLTYPE	XX
DALI / Switch Dim	DA
ON/OFF	NF

ACCESORIOS


Kit Suspensión	Plata
Kit Suspensión 1,5m (1un)	80303017.SL
Kit Suspensión 3 m (1un)	80303018.SL
Kit Suspensión 5 m (1un)	80303019.SL