


**DESCRIPCIÓN**



Brilumen presents TREV, a tailor-made LED lighting solution for large retail stores such as hypermarkets, warehousing and industrial environments, which is characterized by maximum efficiency, a high flexibility and a short return on investment. Thanks to an effective clipping system, TREV is an evolving Trunking light on which you can combine easily Efficiency, High Performance or Blind Cover modules into one main rail according to the local needs, minimizing total cost (low energy consumption, mounting and maintenance costs). With TREV, it is possible to mount light lines up to 5,17 meters seamless, with an LED efficacy up to 178lm/W, combining a wide variety of beam angle (narrow/medium/ wide/asymmetrical/double asymmetrical) that allows to change the light distribution according to the needs. The TREV Trunking system made of extruded aluminium has a 5 Year Warranty, is available in suspended or surface mounted version, in ON-OFF or DALI mode, with or without an emergency kit and can be integrated into a Smart Lighting system. You can choose between 4000K or 5000K colour temperature and textured black, anodized aluminium or smooth white finishing colours. TREV is an ideal solution if you are looking for a versatile and quick-mounting Trunking system that fits all the industrial and retail requirements.

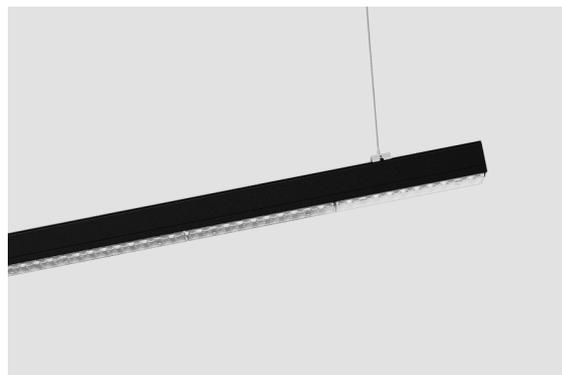

<b>FIJACIÓN</b>	AreasAplicação TEST ES
<b>MONTAJE</b>	Suspendida/Superficie
<b>DISTRIBUCIÓN DE LUZ</b>	Directa
<b>FUENTE DE ALIMENTACIÓN</b>	220-230V / 50-60 Hz
<b>GARANTÍA</b>	5 Años
<b>ACABADO</b>	Anodizado aluminio, Blanco texturizado, Negro texturizado
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

**CARACTERÍSTICAS DEL LED**

<b>EFICIENCIA LUMINOSA</b>	UP TO 178 lm/W
<b>IK</b>	IK04
<b>CRI</b>	CRI→80
<b>VIDA ÚTIL</b>	50.000 Horas
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>RIESGO FOTOBIOLÓGICO</b>	RG1

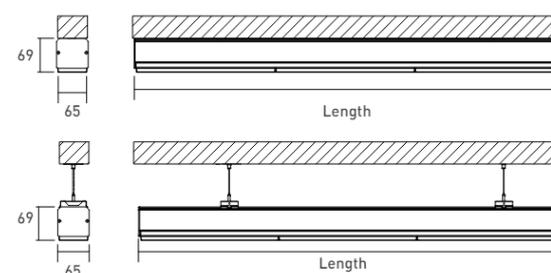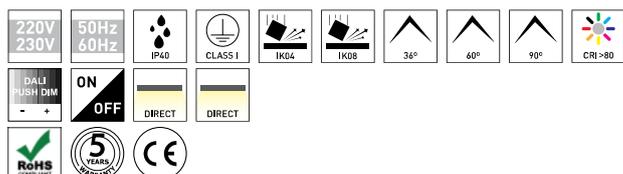**DISEÑO TÉCNICO**

**ICONOGRAFÍA**

**TREV EFFICIENCY  
TABLA DE PRODUCTOS Y ESPECIFICACIONES TÉCNICAS - CRI→80**

LONGITUD	POTENCIA	ACABADO	TEMP. COLOR	CONTROL TIPO	LED LUMENS	LUMENS LUM.	CÓDIGO
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3723	168XX.0830.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3803	168XX.0860.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3763	168XX.0890.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3763	168XX.08AS.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3803	168XX.08DAS.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3803	168XX.08XXS.840.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3778	168XX.0830.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3859	168XX.0860.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3818	168XX.0890.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3818	168XX.08AS.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3859	168XX.08DAS.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3859	168XX.08XXS.850.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7446	168XX.1730.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7606	168XX.1760.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7526	168XX.1790.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7526	168XX.17AS.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7606	168XX.17DAS.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7606	168XX.17XXS.840.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7555	168XX.1730.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7718	168XX.1760.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7637	168XX.1790.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7637	168XX.17AS.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7718	168XX.17DAS.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7718	168XX.17XXS.850.FI

**SELECCIONA TU OPCIÓN  
PREFERIDA**

CONTROL TIPO	XX
DALI / Switch Dim	DA
ON/OFF	NF

TEMP. COLOR	CT
4000K	40
5000K	50


ACABADO	FI
Anodizado aluminio	AL
Negro texturizado	TB
Blanco texturizado	TW

**ACCESORIOS**

	Cab. de alimentación REVO 3x1,5mm2 - 1,5M 5x1,5mm2 - 1,5M 7x1,5mm2 - 1,5M 9x1,5mm2 - 1,5M	5 m	3 m	1,5 m
		30800265	30800261	30800257
		30800266	30800262	30800258
		30800267	30800263	30800259
	Kit Suspensión Kit Suspensión 1,5m (1un) Kit Suspensión 3 m (1un) Kit Suspensión 5 m (1un)	Plata		
		80303017.SL		
		80303018.SL		
		80303019.SL		
	TREV Cubierta ciega  Cubierta ciega 868mm SEM DescAbr - 3681736.AL SEM DescAbr - 3681736.TB SEM DescAbr - 3681736.TW	Negro texturizado	Branco Texturado	Anodizado aluminio
		3680868.TB	3680868.TW	3680868.AL
		3681736.AL		
		3681736.TB		
		3681736.TW		
	Cableado Revo Cableado Revo 3wr Cableado Revo 5wr Cableado Revo 7wr Cableado Revo 9wr	.		
		3WR.10.17		
		5WR.10.17		
		7WR.10.17		
		9WR.10.17		
	Tapas para TREV  Tapas para TREV	Negro texturizado	Branco Texturado	Anodizado aluminio
		80303061.TB	80303061.TW	80303061.AL
	REVO/TREV Junta lineal REVO/TREV Junta lineal	.		
		5004-014		
	Clip de montaje Clip de montaje	.		
		5004-020		
	Kit de emergencia 150W 1H Kit de emergencia 150W 1H	.		
		6080-006		
	Kit de emergencia 150W 3H Kit de emergencia 150W 3H	.		
		6080-007		
	CASAMBI - DALI Interface CASAMBI - DALI Interface	CASAMBI		
		8030-2590		


DATOS FOTOMÉTRICOS

DIAGRAMA POLAR Y FLUJO LUMINOSO - LENTE Titulo

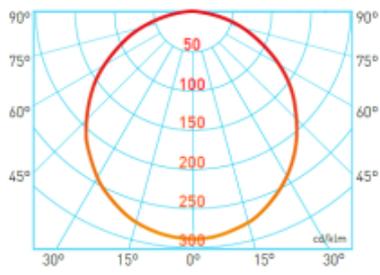

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / ØØØK CØIEØ 112ØMM

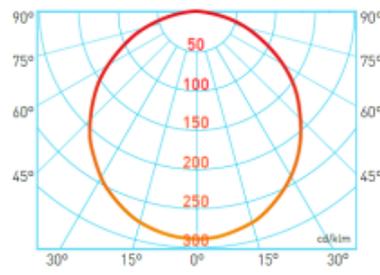

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / ØØØK CØIEØ 112ØMM