

DESCRIPTION

CUCKOO is a recessed downlight with the ability to transform into a directional projector. This feature makes it an ideal product for retail lighting projects where a versatile and elegant luminaire is needed, which can either be used as a fixed light spot, or as a directional projector. CUCKOO incorporates a high performance LED with CRI + 90. It is available in a high quality white or black textured finish.


| | |
|--------------------|--------------------------------|
| MOUNTING TYPE | Recessed |
| LIGHT DISTRIBUTION | Direct |
| WARRANTY | 5 Years |
| FINISHING | Textured Black, Textured White |
| CONTROL | CASAMBI, DALI, ON/OFF |




LED FEATURES

| | |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 136 lm/W |
| CRI | CRI→90 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |

TECHNICAL DRAWING

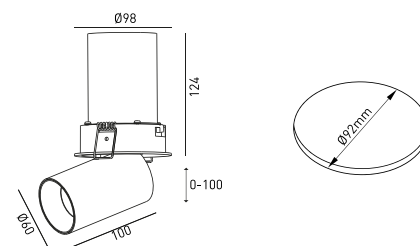

ICONOGRAFIA

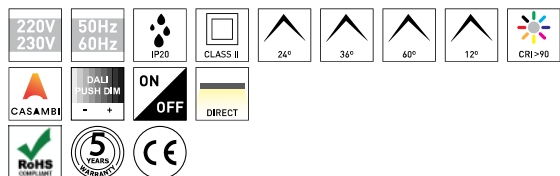

CUCKOO DOWNLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| POWER | FINISHING | CONTROL TYPE | BEAMANGLE | UGR | LED LUMENS | LUMINAIRE LM | LEDEFFICACY | COLOR TEMP. | CODE |
|-------|-----------|--------------|----------------|-----|------------|--------------|-------------|-------------|-----------------|
| 12,3 | TB, TW | CS, DA, NF | 12, 24, 36, 60 | | 1579 | 1343 | 129 | 2700K | 444XX.BA.927.FI |
| 12,3 | TB, TW | CS, DA, NF | 12, 24, 36, 60 | | 1643 | 1397 | 134 | 3000K | 444XX.BA.930.FI |
| 12,3 | TB, TW | CS, DA, NF | 12, 24, 36, 60 | | 1669 | 1419 | 136 | 4000K | 444XX.BA.940.FI |

SELECT YOUR PREFERRED
OPTION

| CONTROL TYPE | XX | FINISHING | FI | BEAMANGLE | BA |
|--------------|----|----------------|----|-----------|----|
| CASAMBI | CS | Textured Black | TB | 12° | 12 |
| DALI | DA | Textured White | TW | 24° | 24 |
| ON/OFF | NF | | | 36° | 36 |
| | | | | 60° | 60 |

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS .

