

DESCRIPTION

The range of SPAR track lights promises to innovate the technical lighting of retail stores. This new product collection consists of more efficient track lights than others in the market, with much higher colour rendering indexes (CRI) with LED chips to light specific locations such as markets, bakeries, restaurants, butcheries or fish markets. This range of track lights, when installed in the right location, highlight the features of the products and, therefore, help to stimulate the goods acquisition.


MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 142 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING



ICONOGRAFIA

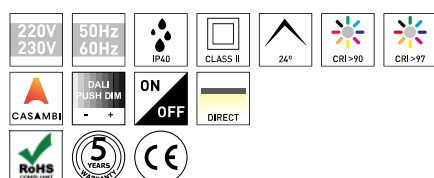

SPAR EFF. UNIVERSAL 24W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

POWER	FINISHING	CONTROL TYPE	BEAMANGLE	LED LUMENS	LUMINAIRE LM	LEDEFFICACY	COLOR TEMP.	CODE
24,1	TB, TW	CS, DA, NF	24, 38	3215	2733	134	2700K	445XX.BA.927.FI
24,1	TB, TW	CS, DA, NF	24, 38	3350	2848	140	3000K	445XX.BA.930.FI
24,1	TB, TW	CS, DA, NF	24, 38	3402	2892	142	4000K	445XX.BA.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	BEAMANGLE	BA	FINISHING	FI
CASAMBI	CS	24°	24	Textured Black	TB
DALI	DA	38°	38	Textured White	TW
ON/OFF	NF				




SPAR EFF. UNIVERSAL 24W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

POWER	FINISHING	CONTROL TYPE	BEAMANGLE	LED LUMENS	LUMINAIRE LM	LEDEFFICACY	COLOR TEMP.	CODE
24,6	TB, TW	CS, DA, NF	24, 38	2855	2427	117	2700K	469XX.BA.9727.FI
24,6	TB, TW	CS, DA, NF	24, 38	2969	2524	121	3000K	469XX.BA.9730.FI
24,6	TB, TW	CS, DA, NF	24, 38	3044	2588	125	4000K	469XX.BA.9740.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	BEAMANGLE	BA	FINISHING	FI
CASAMBI	CS	24°	24	Textured Black	TB
DALI	DA	38°	38	Textured White	TW
ON/OFF	NF				

ACCESSORIES

	230V Track ON/OFF	White	Black
	230V Track ON/OFF 1M	3080-0300.WH	3080-0300.BL
	230V Track ON/OFF 2M	3080-0301.WH	3080-0301.BL

	230V Track DALI	White	Black
	230V Track DALI 1M	3080-0517.WH	3080-0517.BL
	230V Track DALI 2M	3080-0518.WH	3080-0518.BL

	Recess. 230V Track ON/OFF	White	Black
	230V Track ON/OFF 1M	3080-0336.WH	3080-0336.BL
	230V Track ON/OFF 2M	3080-0337.WH	3080-0337.BL

	Recessed 230V Track DALI	White	Black
	230V Track DALI 1M	3080-0553.WH	3080-0553.BL
	230V Track DALI 2M	3080-0554.WH	3080-0554.BL