


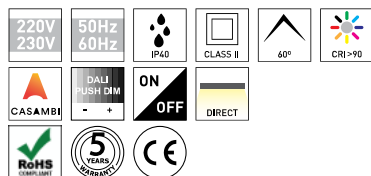
**DESCRIPTION**

Bonnard is a new cylindrical fixture made in high-quality aluminum and textured white finishing, with a silver-grey reflector. With reduced dimensions and only 10cm high, a CRI→90 and a 60° beam angle. It is available in a ceiling surface mounting, and in 2700K, 3000K and 4000K colour temperatures. This discreet but efficient lighting fixture guarantees a good result in any project.

<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 139 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**BONNARD SURFACE SPOTLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	16.6	TB, TW	CS, DA, NF	60	2052	1744	2700K	5393XX.BA.927.FI
100	16.6	TB, TW	CS, DA, NF	60	2185	1857	3000K	5393XX.BA.930.FI
100	16.6	TB, TW	CS, DA, NF	60	2300	1955	4000K	5393XX.BA.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	60°	60
DALI / Switch Dim	DA	Textured White	TW		
ON/OFF	NF				