

DESCRIPTION

CUCKOO is a recessed downlight with the ability to transform into a directional projector. This feature makes it an ideal product for retail lighting projects where a versatile and elegant luminaire is lusted, which can either be used as a fixed light spot, or as a directional projector. CUCKOO incorporates a high performance LED with CRI + 90. It is available in a high quality white or black textured finish.


MOUNTING	Recessed
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 97 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

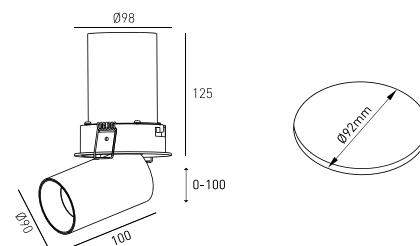

ICONOGRAPHY

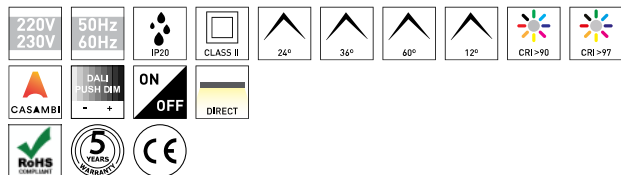

 CUCKOO DOWNLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	11,4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5444XX.BA.927.FI
100	11,4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5444XX.BA.930.FI
100	11,4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5444XX.BA.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / PUSH Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			36°	36
				60°	60

 CUCKOO DOWNLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	12,8	TB, TW	CS, DA, NF	12, 24, 36, 60	1243	1056	2700K	5444XX.BA.9727.FI
100	12,8	TB, TW	CS, DA, NF	12, 24, 36, 60	1319	1122	3000K	5444XX.BA.9730.FI
100	12,8	TB, TW	CS, DA, NF	12, 24, 36, 60	1396	1187	4000K	5444XX.BA.9740.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / PUSH Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			36°	36
				60°	60