

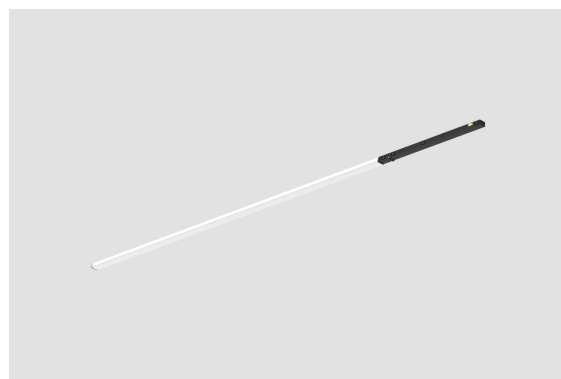
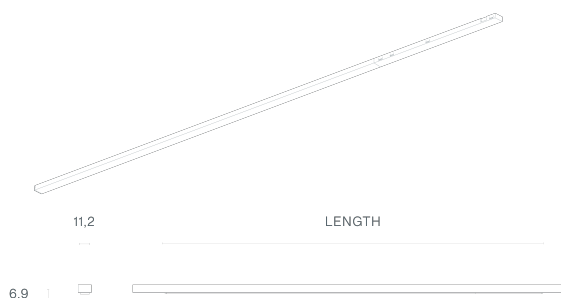

**DESCRIPTION**

PROLINER MICRO FLAT light modules — available in OPAL or LOW GLARE versions — are extremely narrow and compact, creating an ultra-thin line of light on the ceiling or wall. The opal polycarbonate diffuser delivers smooth, uniform light, while the low glare reflector emits recessed points of light, significantly reducing the Unified Glare Rating (UGR), minimizing visual discomfort and protecting the eyes. Designed for installation in low-voltage MICRO tracks (48V), these modules are ideal for projects where lighting must be effective yet visually discreet — almost imperceptible.

LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Black
CONTROL	DALI

**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 125 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**


**PROLINER FLAT OPAL MICRO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
674	7.4	BL	DL	90	900	429	3000K	545XX.0609.930.FI
1175	14.5	BL	DL	90	1800	858	3000K	545XX.1109.930.FI
1674	21.6	BL	DL	90	2700	1287	3000K	545XX.1609.930.FI

**SELECT YOUR PREFERRED OPTION**

<b>CONTROL TYPE</b> XX	<b>FINISHING</b> FI	<b>BEAM ANGLE</b> BA
DALI DL	Black BL	90° 90

**ACCESSORIES**

	<b>MT15 - Track 48V MICRO</b> SEM DescAbr - 3080-0620.B SEM DescAbr - 3080-0620.W SEM DescAbr - 3080-0621.B SEM DescAbr - 3080-0621.W	Black 3080-0620.BL 3080-0620.WH 3080-0621.BL 3080-0621.WH	White 3080-0620.WH 3080-0621.WH
	<b>MT16 - Track 48V MICRO</b> SEM DescAbr - 3080-0615.B SEM DescAbr - 3080-0615.W SEM DescAbr - 3080-0616.B SEM DescAbr - 3080-0616.W	Black 3080-0615.BL 3080-0615.WH 3080-0616.BL 3080-0616.WH	White 3080-0615.WH 3080-0616.WH
	<b>MT1 - Track 48V MICRO</b> SEM DescAbr - 3080-0600.B SEM DescAbr - 3080-0600.W SEM DescAbr - 3080-0601.B SEM DescAbr - 3080-0601.W	Black 3080-0600.BL 3080-0600.WH 3080-0601.BL 3080-0601.WH	White 3080-0600.WH 3080-0601.WH
	<b>MT5 - Track 48V MICRO</b> SEM DescAbr - 3080-0610.B SEM DescAbr - 3080-0610.W SEM DescAbr - 3080-0611.B SEM DescAbr - 3080-0611.W	Black 3080-0610.BL 3080-0610.WH 3080-0611.BL 3080-0611.WH	White 3080-0610.WH 3080-0611.WH