


DESCRIPTION


The PROLINER is a magical line of light. Consisting of particularly narrow modules, it allows the creation of a versatile light line in a low-voltage magnetic rail. It is composed of 3 different light modules. A module with opal or prismatic polycarbonate diffuser, a module with a low glare reflector, and a module with a 30° lens to control the beam angle. By combining these modules, the PROLINER draws a thin and elegant light line through its opal polycarbonate diffuser. In the low glare version, the light is emitted in a recessed way, protecting the eyes and highlighting the more reliably colours of the lightened objects. The option with a 30° lens allows creating the best light distribution according to the space and to focus the light on specific points. The magnetic application allows the greater flexibility of light configuration in space, and can be reconfigured with complete freedom, without resorting to specialized technicians or special tools. The magnetic rails where the PROLINER is installed are low voltage (48V). PROLINER has been specially designed to be combined with APALIS or ROSS. These discreet application luminaires in magnetic rails are specially intended for lighting projects where the reconfiguration of spaces and objects may occur regularly, such as, stores, art galleries, museums, exhibition venues, etc... Together, these products can make your lighting project a truly magical space.

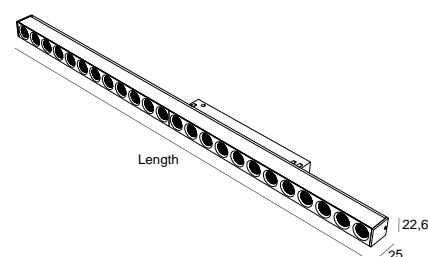

MOUNTING TYPE	Magnetic
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Black, White
CONTROL	CASAMBI, DALI, ON/OFF

TECHNICAL DRAWING

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 143 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

PROLINER LENS 48V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	8.2	BL, WH	CS, DL, NF	30	1109	1017	3000K	153XX.05L3.9BA.FI
570	8.2	BL, WH	CS, DL, NF	30	1164	1068	4000K	153XX.05L3.940.FI
1130	16.4	BL, WH	CS, DL, NF	30	2218	2033	3000K	153XX.11L3.9BA.FI
1130	16.4	BL, WH	CS, DL, NF	30	2328	2135	4000K	153XX.11L3.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Black	BL	30°	30
DALI	DL	White	WH		
ON/OFF	NF				

ACCESSORIES

	BT1E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 1M Track 48V EVO 2M Track 48V EVO 2M	White 3080-0175E.WH 3080-0175E.BL Black 3080-0176E.WH 3080-0176E.BL
	BT2E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 1M Track 48V EVO 2M Track 48V EVO 2M	White 3080-0177E.WH 3080-0177E.BL Black 3080-0178E.WH 3080-0178E.BL
	TK3 Magnetic Track Magnetic Track 48V 1M Magnetic Track 48V 1M Magnetic Track 48V 2M	White 3080-0205.WH 3080-0205.BL Black 3080-0206.WH

Magnetic Track 48V 2M

3080-0206.BL



TK5E - Track 48V EVO
Track 48V EVO 1M
Track 48V EVO 1M
Track 48V EVO 2M
Track 48V EVO 2M

White Black
3080-0250E.WH
3080-0250E.BL
3080-0251E.WH
3080-0251E.BL




TK9E - Track 48V EVO
Track 48V EVO 1M
Track 48V EVO 1M
Track 48V EVO 2M
Track 48V EVO 2M

White Black
3080-0211E.WH
3080-0211E.BL
3080-0212E.WH
3080-0212E.BL


PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo

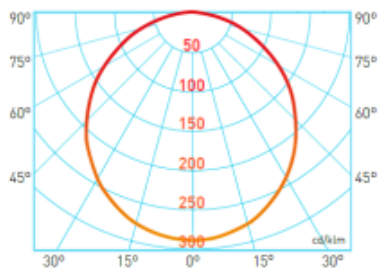

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 1000K CRI90 1120MM

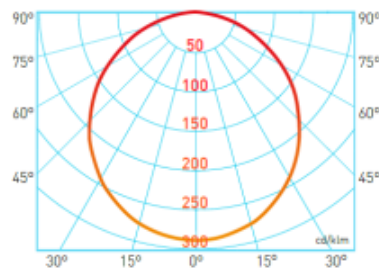

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 1000K CRI90 1120MM